

RUST LUBE

DESCRIPTION

Multi-functional rust and contact spray. Mixture of mineral oil, petroleum and corrosion protecting additives.

PROPERTIES


- Rust Lube is a product that has been adapted to most servicing tasks.
- Dissolves rust on nuts, bolts, pipes and hinges.
- Removes water and moist from ignition switches and conductor of electricity.
- Secures connectors on distributor caps.
- Eliminates squeaking noises.
- Provides lasting protection against rust and corrosion.
- Lubricates smooth and glossy surfaces.
- Practical usage with both short and long pipe.
- Green certified propellant with CO2 reduction up to 90%, naturally produced via organic waste = Green Propellant.

FIELD OF APPLICATION

- Loosens rusted-in screws.
- Protects brake linkages.
- Prevents ingress of water to ignition contacts.
- Dissolves rust on nuts, bolts, pipes and hinges.
- Cleanses and maintains brake-clutches, Bowden wires and chains of different kinds and keeps them serviceable.

USER INSTRUCTIONS

Shake well. Spray on the treated surface in a distance of 20 cm.
Apply on dry and clean substrates (using Soft Clean), free of loose particles.

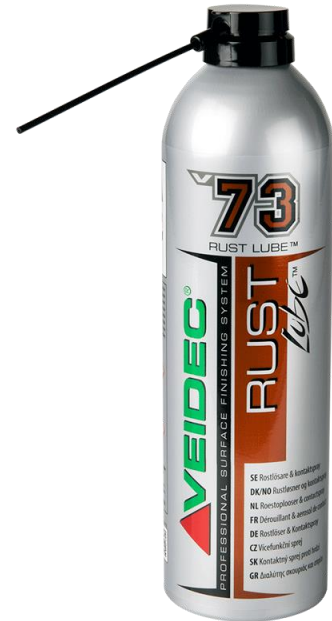

RUST LUBE – RUL – 73

Art.no. 20201

Signature: JH

Date: 2022-02-14

This product information is property of VEIDEC AB and is not to be forwarded to third persons without our agreement. The product information has been made out according to our experiences; the corresponding distributing company has to point out probable characteristics as to the use of the product as the application fields are often very different. The recommendations as to technical use are not binding and do not justify any contractual relationship and subsidiary obligations under the contract of purchase. They especially do not relieve the buyer from testing our product on his own as to the suitability for the designated field of application.

RUST LUBE

TECHNICAL DETAILS

Color:	Yellow.
Packaging:	500 ml alu can aerosol: Art.no. 20201
Odor:	Mineral - strong.
Basic oil:	Mineral oil.
Density (20°C):	0,80 g/ml.
VOC (directive 2010/75/EU):	47,8 %
Electric conductivity:	5,3 x 10 ⁻⁸ [S]
Shelf life (temp.) months (+5°C to +25 °C):	24 months.
Temperature resist:	-30°C to +250°C
Application & Surface temperature:	-10°C to +50°C
Certificate/Registration:	GREEN PROPELLANT, BETA
Others:	In compliance with the legal regulations, please see current Material Safety Data Sheet. https://veidec.com/en/msds
User Instruction:	Scan the QR-code for MSDS, video and other information.



CERTIFICATES/REGISTRATIONS



GREEN PROPELLANT.



Rust Lube is registered by BETA.

SYMBOLS



Shake well before use.

FEATURES



UP-AND-DOWN.

Reaction with elastomers:	Resistant/ Resistant to a limited extent/ Not tested / Not resistant
ACM – Acrylat rubber:	Resistant
CR – Chloroprene rubber:	Resistant
CSM – Chlorosulfonated rubber:	Resistant
EPDM – Ethylene propylene diene rubber:	Resistant
FKM - Fluorocautchoc	Resistant
NBR – Nitrile butadiene rubber:	Resistant
NR – Natural rubber:	Not tested
SBR – Styrene butadiene rubber:	Resistant
SQM/MVQ – Silicone rubber:	Resistant

RUST LUBE – RUL – 73

Art.no. 20201

Signature: JH

Date: 2022-02-14

This product information is property of VEIDEC AB and is not to be forwarded to third persons without our agreement. The product information has been made out according to our experiences; the corresponding distributing company has to point out probable characteristics as to the use of the product as the application fields are often very different. The recommendations as to technical use are not binding and do not justify any contractual relationship and subsidiary obligations under the contract of purchase. They especially do not relieve the buyer from testing our product on his own as to the suitability for the designated field of application.